
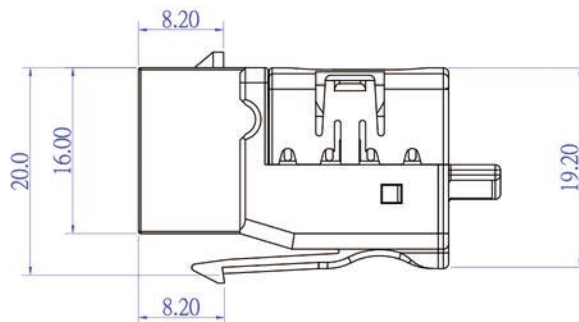

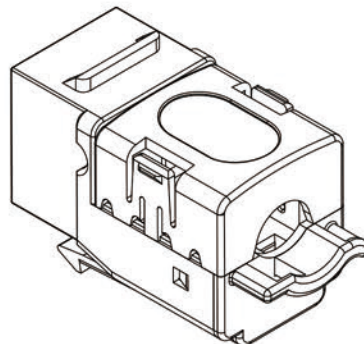


1	2
MOLDING	
--	--

10	11	12	13
DATE	REV.	REVISION	DRAFTING

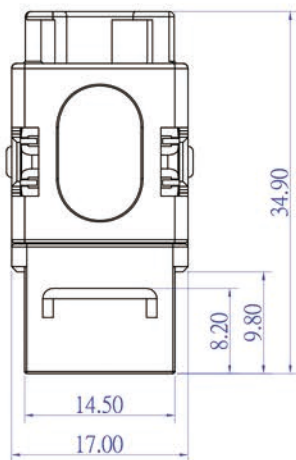


SPECIFICATION

- 1.Jack Housing: Engineering Plastic.
- 2.Jack Terminal: Phosphor Bronze, 3u"、15u"、50u" gold plated over Nickel plated in contact area Tin-lead over nickle in solder area.
- 3.IDC Housing: Engineering Plastic .
- 4.IDC Terminal: Phosphor Bronze, nickel plated 50-60 micro-inch.
- 5.P.C.Board: FR-4,T=1.6mm.
- 6.Operation Temperature : -10°C to 60°C.
- 7.Insertion Force: 900gms for 8 contacts.
- 8.Retention : 7.7 kgs between jack and plug.
- 9.Durability : 750 Cycles contact resistance test check every 100 Cycles.Insertion cycles at 20 cycles/minute max.
- 10.Supports: T568A & T568B wiring compatible with Category 6A requirement .
- 11.Tool: DUAL.

ELECTRICAL

- 1.Current rating:1.5 Amps
- 2.Insulation resistance:500 MΩ
- 3.Contact resistance:20 mΩ
- 4.DC resistance:0.1 Ω
- 5.Dielectric withstanding voltage:500 V

PIN/PAIR ASSIGNMENTS

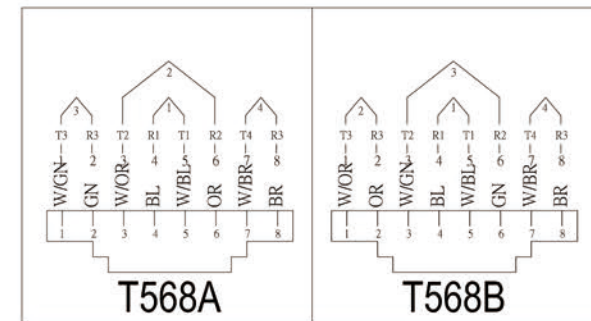

Unless specified on the drawing ,tolerances are per the fallows:

X.	±0.20
. X	±0.10
. XX	±0.05
. X°	±0.30
X°	±3.00

上海灵沛信息科技有限公司

TITLE	超六类90° 非屏蔽信息模块			
DRAW. NO	DRAW	DATE		
SCALE	1:1	CHECK	DATE	
UNIT	mm	APPROVER	SHEET	1:1

Material	Part Number	Note	RoHS	Reach	Other	Department	RD	3RD
1	2	3	4	5	6	7	8	9